

THE POWER TO GO ANYWHERE...



# 10S-H

**POWERTRAXX**   
VEHICLES INC.

## DIMENSIONS

Weight (basic vehicle)	9,072 kg [20,000 lbs]
Overall Length (includes extensions)	7,417 mm [292 in]
Overall Width	2,591 mm [102 in]
Overall Height	2,794 mm [110 in]
Ground Clearance	483 mm [19 in]

## OPERATOR CABIN

Enclosed ROPS, ISO 3471	Sunroof / Hatch above seat
Single occupancy	2-Person, 5-person occupancy available
44,000 BTU heater with defrosters	Air Conditioning available
Front heavy duty wet blade wiper	Rear wiper available
Hi-backrest, adjustable suspension seat	"Operator Presence" sensor in seat

## CHASSIS

Heavy duty welded tub	Front and rear extensions
Drain holes/plugs	Access panels (Qty. 4)

## CAPACITIES

Fuel Tank	303 L [80 US Gal]
Hydrostatic Tank	170 L [45 US Gal]
Cooling System	23 L/min [7 US Gal]

## SUSPENSION

Solid steel walking beam	Heavy duty arched type
825 x 20 solid rubber tires (Qty. 8)	3-piece steel rims
Solid steel hubs, oil filled	Urethane hubcaps with sight glass

## TRACKS

Heavy Duty steel D-dent grouser bar	838 mm [33 in] with Reinforcing Bar
305 mm [12 in], 6ply rubber belting	Tensioner Cylinder, grease type
Steel hub sprocket	12, 14 Tooth replaceable urethane segments

## CONTROLS

Microprocessor with LCD colour display	Steering parameters / Diagnostics
Electronic Joystick with counter rotate	Hand throttle, foot pedal

## ELECTRICAL SYSTEM

12V DC	160 Amp alternator
Batteries (Qty. 3)	200 AH, 1125 CCA (each)

## PERFORMANCE

Payload	11,340 kg [25,000 lbs]
Maximum Speed	16 km/hr [10 mph]
Fording Depth	1,219 mm [48 in]
Turning Radius	Zero degrees
Ground Pressure (6in penetration)	
Unloaded	0.147 kg/cm <sup>2</sup> [2.10 psi]
Loaded	0.332 kg/cm <sup>2</sup> [4.73 psi]

## Maximum Gradeability

Forward/downhill	60% [31°]
Sidehill	40% [22°]

## ENGINE

Cummins QSB 6.7L, 6 cyl	Turbo diesel, EPA Tier 3
Horsepower @ 2200 rpm	164 kW [230 hp]
Torque @ 1400 rpm	949 N-m [700 lb-ft]

## HYDRAULICS

Funk Pump drive (triple pad)	Additional pump provision on top pad
Sauer Danfoss 90 series pumps	Sauer Danfoss H1B motors
Fairfield Torque Hubs	

## STANDARD EQUIPMENT


AM/FM stereo w/ speakers	44,000 BTU heater with defrosters
12V dash power-point, USB port	4 Forward lights, 2 Rear lights
Block heater, Oil pan heater	Central greasing bank
Fire extinguisher	2 Maintenance/Operators/Parts manuals

## INSTRUMENTS

Hydrostatic oil temperature	Voltmeter
Engine oil pressure	Engine temperature
Fuel level	Tachometer
Warning lights	Buzzers (optional)
High/Low speed selector	High/Low idle switch

## OPTIONAL EQUIPMENT

Espar / Webasto heater with timer	Hydraulic tank warmer
Front/rear hydraulic winch package	Beacon / Searchlight
Window guard	Brush guard
Back-up camera system w/ LCD colour display	External mirrors
Electronic inclinometer with alarm	Pintle hitch
Maintenance kit	Blade/plow kit
Other items available upon request	

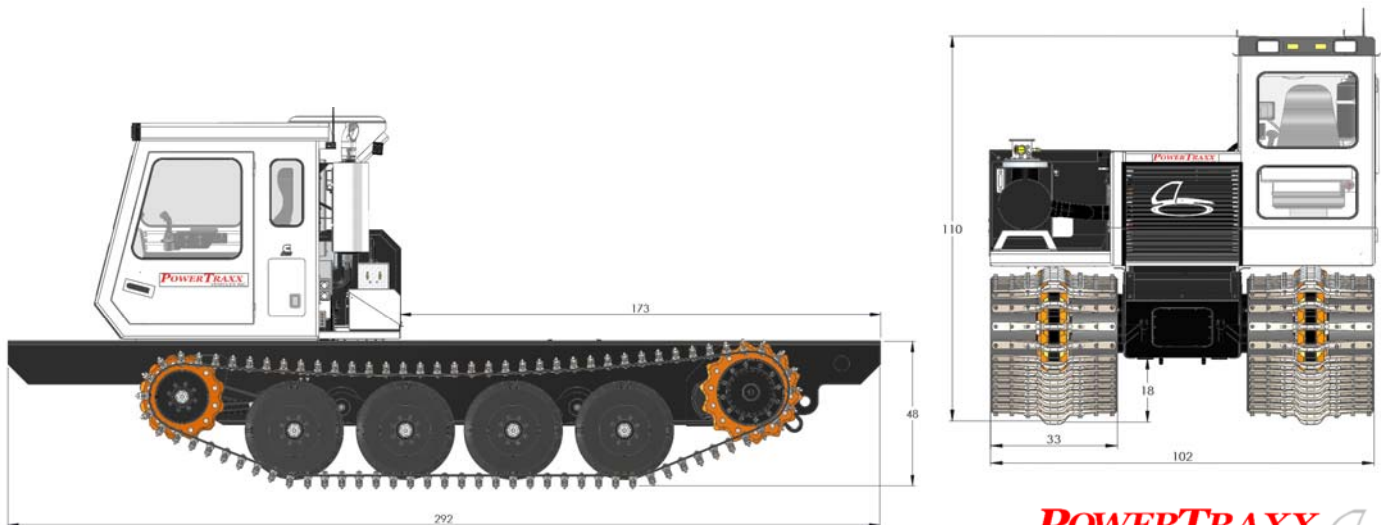

PowerTraxx Vehicles Inc.

**POWERTRAXX**  
VEHICLES INC.