RT10

PowerTraxx &

		NS

Weight (basic vehicle)	13,607 kg [30,000 lbs]
Overall Length (includes extensions)	7,417 mm [292 in]
Overall Width	2,590 mm [102 in]
Overall Height	2,844 mm [124 in]
Ground Clearance	406 mm [16 in]

OPERATOR CABIN

Enclosed ROPS, ISO 3471	Escape Hatch above seat
Single occupancy	Seat belt
44,000 BTU heater with defrosters	Air Conditioning
Front/rear heavy duty wet blade wiper	Door window, sliding type
Hi-backrest, adjustable suspension seat	"Operator Presence" sensor in seat

CHASSIS

Heavy duty welded tub	Front and rear extensions
Drain holes/plugs	Access panels (Qty. 4)

CAPACITIES

Fuel Tank	303 L	[80 US Gal]
Hydrostatic Tank	208 L	[45 US Gal]
Cooling System	204 L/min	[53 US Gal]

SUSPENSION

Solid steel walking beam	Heavy duty arched type
Track roller guides	20" cast roller wheels
Solid steel hubs, oil filled	Urethane hubcaps with sight glass

TRACKS

800 mm [32 in] continuous rubber track	Auto-tensioning system
Drive sprocket, 4 segments	Idler wheel

CONTROLS

Microprocessor with LCD colour display
Electronic Joystick with counter rotate

ELECTRICAL SYSTEM

12V DC	160 Amp alternator
Batteries (Qty. 3)	200 AH, 1125 CCA (each)

PERFORMANCE

Payload	11,340 kg [25,000 lbs]
Maximum Speed	16 km/hr [10 mph]
Fording Depth	1,219 mm [48 in]
Turning Radius	Zero degrees
Ground Pressure (6in penetration)	

Unioaded	0.201 kg/cm	[2.86 psi]
Loaded	0.395 kg/cm ²	[5.62 psi]
Maximum Gradeability		

Forward/downhill	60%	[31°]
Sidehill	40%	[22°]

ENGINE

Cummins QSB 6.7L, 6 cyl	Turbo diesel, EPA Stage V
Horsepower @ 2200 rpm	164 kW [230 hp]
Torque @ 1500 rpm	1,152 N-m [850 lb-ft]

HYDRAULICS

Stiebel pump drive (triple pad)	Device pump provision on top pad
Sauer Danfoss H1B pumps	Sauer Danfoss H1B motors
Auburn Gear Power Wheel drives	

STANDARD EQUIPMENT


AM/FM ste	reo w/ speakers	44,000 BTU heater with defrosters
12V dash po	ower-point, USB port	2 Forward lights, 2 Rear lights
Block heate	r	Central greasing bank
Fire extingu	isher	Operators/Parts manuals
Webasto he	eater w/timer	Hydraulic tank warmer
Back-up car	mera system w/ LCD colour displ	ay Electronic inclinometer

TOUCH SCREEN DISPLAY/INSTRUMENTS

Hydrostatic oil temperature	Voltmeter
Engine oil pressure	Engine temperature
Fuel level	Tachometer
Warning lights	Buzzers (optional)
High/Low speed selector	High/Low idle switch

OPTIONAL EQUIPMENT

Hydraulic winch package	Beacon / Searchlight
Window guard	Brush guard
Side-view camera	Pintle hitch
Maintenance kit	Blade/plow kit

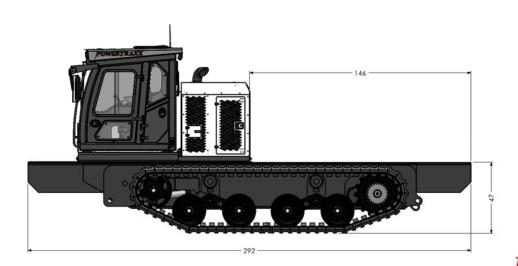

Steering parameters / Diagnostics Hand throttle, foot pedal

